

Jensolin Acrylic Distemper

Jensolin Acrylic Distemper, an eco-friendly, water-based distemper provides unmatched quality at an exceptionally affordable price.

PRODUCT BENEFITS



- Value for money
- Smooth and Matt Finish
- Excellent coverage and opacity



PRODUCT FEATURES

AVAILABLE PACK SIZES



2 Kg

5 Kg

10 Kg

20 Kg

COLOURS



Available in more than 950+ shades as per the J&N Fan Deck

COVERAGE




90-100* sq. ft. / Kg for two coat finish under normal conditions

*Actual coverage may vary due to factors such as method and condition of application, surface roughness and porosity and weather conditions.

RECOMMENDED USE

Jensolin Acrylic Distemper is ideal for interior surfaces like plastered surface, ceilings, asbestos and hard boards.

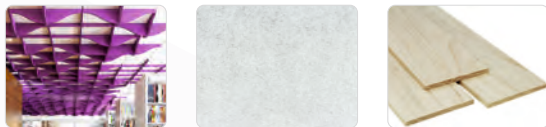

SURFACE DRYING TIME



Technical Data:

- Colour : White & Colours
- Gloss / Sheen : Matt
- Recommended Dilution : Up to 70 - 80% mixing with water, depending on the application consistency required
- Surface Dry time : 30 minutes* (25°C / 50% RH)
- Over coating period : 3 - 4 hrs* (25°C / 50% RH)
- Stability of thinned paint : Use within 24 hours

*Recoat and drying period may vary under different conditions



HOW TO PREPARE (SURFACE / WALL)

Cleaning:

- Ensure that the surface is free from dirt, grease, rust and moisture.
- Sand the surface using Emery Paper 180 to remove loosely bound particles, rust, peeling or flaking paint, etc.
- Wipe the surface clean.

New concrete, masonry or plaster: Allow the newly constructed cement surface to cure for minimum of 30 days, prior to application of Jenson & Nicholson Acrylic Base Water Thinnable Cement Primer. Ensure that the wall to be painted is completely dry and free from any cement residue.



HOW TO APPLY ?

- Apply one coat of J&N Acrylic Base Water Thinnable Cement Primer at the recommended dilution level, using standard brush or spray application. Let it dry for minimum 4-5 hours and then apply Jenson White Cement Based Wall Putty using Putty Knife. Allow it to dry for 4-6 hrs. Follow this with one more coat of J&N Acrylic Base Water Thinnable Cement Primer.
- Dilute Jenson Acrylic Distemper as per the recommended ratio and apply the first coat. Let it dry for 4-5 hrs and if required, apply a second coat.

Application precautions:

- Do not over thin the paint above the recommended dilution levels.
- Stir the paint properly before use.
- Seal the container when not in use.

Post application care:

Ensure proper washing and cleaning of all dust, Algal and Fungal growth at regular intervals of 5-6 months, for longer durability and better retention of aesthetics.

For product related queries, feedback and quality complaints, Please contact:

Customer care: +91 8300 03 05 05

E-mail: ccc@jnpl.in,

Visit us: www.jnpl.in

Regd. Office: Jenson & Nicholson Paints Private Ltd.

Old No. 109B, New No. 124, Developed Plots, SIDCO Industrial Estate, Ambattur, Chennai - 600 098. Tamil Nadu, INDIA.

All information mentioned in this data sheet are based on tests conducted in laboratory conditions. Results may vary depending upon atmospheric conditions, application methodologies and substrates. We reserve the right to alter the given data without notice.

Ver:2.0 / TDS / 2020



Storage and Transportation:

- Store the containers at constant temperatures, away from direct sunlight / elevated temperatures.
- Keep the product in frost-free environment.
- Store the containers in upright position to avoid leakage or damage.
- Do not pour the waste paint in drains or other water sources.

Shelf Life:

2 years from the date of manufacture in the original tightly closed containers, stored away from direct sunlight and excessive heat.

Pack Size:

Available in 2kg, 5kg, 10kg and 20 kg packs.

WHAT ARE THE PRECAUTIONS ?

- Keep containers upright, tightly closed in a cool, dry, well ventilated place.
- Ensure opened containers are tightly closed, when not in use.
- Store away from excessive heat, direct sunlight and other flammable materials.
- Highly Flammable product so, store in place away from heat and sparks and No smoking to be allowed near the product.
- Keep out of reach of children and pets.
- Do not store near food, drinks or animal feed.
- Do not mix with incompatible materials.
- Use personal protective equipment like goggles, face masks and gloves.
- Ensure good ventilation during application and drying.
- Do not inhale the vapour or spray.
- In case of contact with eyes or skin, wash immediately using plenty of water. Seek medical advice, if irritation persists.
- In case of ingestion, seek immediate medical attention and do not induce vomiting.
- Do not dispose any spilled or unused paint in drain, water bodies and landfill.
- Dispose spillages or unused paint and containers, through appropriate disposal agency.